Item # XSG709

for Model EP709

10 Paper Bags – 1 Pre-Motor Filter – 1 Post Motor Filter

Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/trouble shooting checks.

Replacing the Dust Bag

1. To open main unit, press the storage compartment release button to unlock and lift the cover. (Fig. 1)

Fig. 1

Note Vacuuming new carpet or carpet with fine powders may clog the dust bag, so check the bag more often. Never operate without dust bag in place.

2. Remove the old dust bag by pushing the paper bag holder towards the rear of the unit and then pull up on the cardboard collar. **Dispose of paper bags**. **Never reuse Paper Bags**.
3. To insert a new dust bag slide the cardboard collar end with the slot into the matching slot on the holder (a). Cardboard should be behind the (2) two securing tabs on holder. Press the paper bag holder (b) toward the front of the unit and make sure that the paper bag is locked in place. (Fig. 2)
4. Close storage compartment cover.

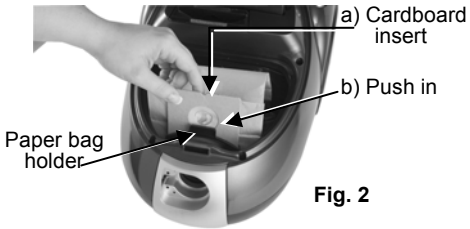

Fig. 2

Warning: Before closing main unit, make certain that paper bag is well inside the compartment and does not get caught between the hinges when closing the cover.

Changing the Pre-Motor Filter

The pre-motor filter is located inside the storage compartment behind the dust bag. (Fig. 3)

- The pre-motor filter should be cleaned at least twice a year or when it becomes visibly soiled.
- Always operate the cleaner with the filter installed.
- Disconnect from electrical outlet before cleaning the filter.
- Do not use a washing machine to rinse the filter.
- Do not use a hair dryer to dry it.
- Always allow 24 hours to air dry.

1. Press the storage compartment release button and open the cover.
2. Remove the paper bag from the unit.
3. Pull the pre-motor filter assembly out of the unit.
4. Remove the pre-motor filter from the filter grill.
5. Rinse the pre-motor filter in lukewarm water and let the pre-motor filter air dry for 24 hours until it is completely dry. (Fig. 4)
6. Replace the pre-motor filter into the filter grill and replace back into the unit.
7. Replace the dust bag and close the storage compartment cover.



Fig. 3

Fig. 4

USA: ***EURO-PRO Operating LLC***
94 Main Mill Street, Door 16
Plattsburgh, NY 12901

Canada: ***EURO-PRO Operating LLC***
4400 Bois Franc
St. Laurent, QC H4S 1A7

Tel.: 1 (866) 98SHARK
www.sharkvac.com

Rev. 06/04
Printed in China

EURO-PRO

Item # XSG709
for Model EP709
10 Paper Bags – 1 Pre-Motor Filter – 1 Post Motor Filter
Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/trouble shooting checks.
Replacing the Dust Bag
1. To open main unit, press the storage compartment release button to unlock and lift the cover. (Fig. 1)

Fig. 1
Note Vacuuming new carpet or carpet with fine powders may clog the dust bag, so check the bag more often. Never operate without dust bag in place.
2. Remove the old dust bag by pushing the paper bag holder towards the rear of the unit and then pull up on the cardboard collar. Dispose of paper bags. Never reuse Paper Bags.
3. To insert a new dust bag slide the cardboard collar end with the slot into the matching slot on the holder (a). Cardboard should be behind the (2) two securing tabs on holder. Press the paper bag holder (b) toward the front of the unit and make sure that the paper bag is locked in place. (Fig. 2)
4. Close storage compartment cover.

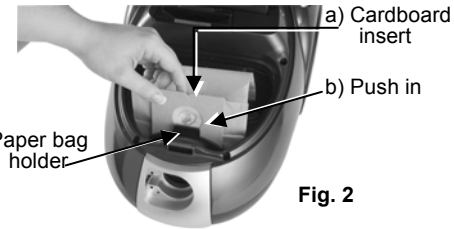

Fig. 2
Warning: Before closing main unit, make certain that paper bag is well inside the compartment and does not get caught between the hinges when closing the cover.
Changing the Pre-Motor Filter
The pre-motor filter is located inside the storage compartment behind the dust bag. (Fig. 3)
- The pre-motor filter should be cleaned at least twice a year or when it becomes visibly soiled.
- Always operate the cleaner with the filter installed.
- Disconnect from electrical outlet before cleaning the filter.
- Do not use a washing machine to rinse the filter.
- Do not use a hair dryer to dry it.
- Always allow 24 hours to air dry.

1. Press the storage compartment release button and open the cover.
2. Remove the paper bag from the unit.
3. Pull the pre-motor filter assembly out of the unit.
4. Remove the pre-motor filter from the filter grill.
5. Rinse the pre-motor filter in lukewarm water and let the pre-motor filter air dry for 24 hours until it is completely dry. (Fig. 4)
6. Replace the pre-motor filter into the filter grill and replace back into the unit.
7. Replace the dust bag and close the storage compartment cover.



Fig. 3

Fig. 4
USA: EURO-PRO Operating LLC
94 Main Mill Street, Door 16
Plattsburgh, NY 12901
Canada: EURO-PRO Operating LLC
4400 Bois Franc
St. Laurent, QC H4S 1A7
Tel.: 1 (866) 98SHARK
www.sharkvac.com
Rev. 06/04
Printed in China
EURO-PRO

Changing the Post Motor Filter

- Filter should be cleaned at least twice a year or when it becomes visibly soiled.
- Always operate the cleaner with the post motor filter installed.
- Disconnect from electrical outlet before cleaning the filter.
- Do not use a washing machine to rinse the filter.
- Do not use a hair dryer to dry it.
- Always allow 24 hours to air dry.

1. Remove the post motor filter cover that is located the rear of the unit. (Fig. 5)

Fig. 5

2. Remove the post motor filter from the filter grill. (Fig. 6)
3. Rinse the post motor filter in lukewarm water and let the post motor filter air dry for 24 hours until it is completely dry. (Fig. 7)
4. Replace the post -motor filter into the filter grill and replace back into the unit.



Fig. 6



Fig. 7

Changing the Post Motor Filter

- Filter should be cleaned at least twice a year or when it becomes visibly soiled.
- Always operate the cleaner with the post motor filter installed.
- Disconnect from electrical outlet before cleaning the filter.
- Do not use a washing machine to rinse the filter.
- Do not use a hair dryer to dry it.
- Always allow 24 hours to air dry.

1. Remove the post motor filter cover that is located the rear of the unit. (Fig. 5)

Fig. 5

2. Remove the post motor filter from the filter grill. (Fig. 6)
3. Rinse the post motor filter in lukewarm water and let the post motor filter air dry for 24 hours until it is completely dry. (Fig. 7)
4. Replace the post -motor filter into the filter grill and replace back into the unit.



Fig. 6



Fig. 7